
## CC1006说明书 成品展开尺寸:195mm\*120mm,折起尺寸:65mm\*120mm 80g书纸,包心折,黑白印刷

Copyright @ warp space. IMISES is an authorized trademark of Shenzhen warp space technology Co., Ltd., and the logo of iMISES has been registered. The company does not assume any responsibility for any errors that may occur in this manual. The information contained in this manual is subject to change without prior notice.

**IMISES** 





Or Visit: https://imises.afterservice.vip



## CC1006 CAMERA

Instruction


Shenzhen Warp Space Technology Co.,Ltd.

24Hour Online After-Sales Service: imises@afterservice.vip

Web: www.imises.com

E-mail: amazon@imises.com

Add: 1906, Jiangnan Times Bldg, Bantian St, Longgang, Shenzhen

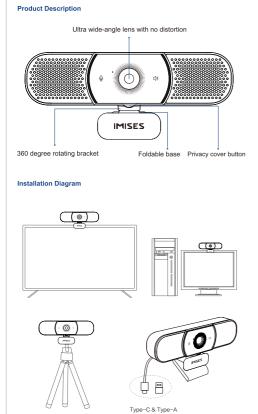

| Front View | Side View  | Back View |
|------------|--|-----------|
| 159mm      | 40 mm 34mm 989 mm 980 mm 989 mm 980 m |           |

## Compatible with the Following Products



**Product Size** 











## **Product Parameter**

| Parameters/Model           | CC1006  |
|----------------------------|---|
| Camera and lens parameters |   |
| Image sensor               | 1/2.7 inch CMOS, 4 million pixels                 |
| Image ratio                | 16:9  |
| Image output               | 2K@30fps, compatible with 1080P, 720P, 480P, 360P |
| Field of view              | 90°   |
| Low illumination           | Support   |
| Focus                      | Auto  |
| White balance              | Auto  |
| Backlight compensation     | Auto  |
| Image noise reduction      | 2D, 3D digital noise reduction                    |
| Interface                  | type-C, type-A                                    |

| Audio input           | Built-in 360° omnidirectional pickup and noise reduction microphone, pickup distance 5 meters  |
|-----------------------|--|
| Audio output          | High-power speaker, professional sound cavity with phase inversion hole  |
| USB Features          |  |
| Operating system      | Windows® 7 Windows 8.1, Windows 10 or higher Mac OS™ 10.10 or higher Google™ Chromebook™ Version 29.0.1547.70 or higher Linux(Need to support UVC) |
| Hardware Requirements | 2.4 GHz Intel <sup>®</sup> Core 2 Duo processor or higher<br>2 GB RAM or more<br>USB 2.0 interface or higher                                       |
| Other parameters      |  |
| Voltage               | 5V   |
| Current               | 500mA (min)  |
| Power consumption     | 5W (max)   |
| Stored temperature    | -40℃ ~ 60℃   |
| Operating temperature | -10°C ~ 40°C   |
| Size (L*W*H)          | 159mm*60mm*65mm  |
| Weight                | 299g   |
| Use environment       | Indoor   |
| Attachment            | 1.5m type-C cable, user manual, certificate of conformity  |